

®FORM PTO-1390  
OFFICE  
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. § 371**

**449122021200**

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

**10/049459**  
Not yet assigned

INTERNATIONAL APPLICATION NO.

**PCT/DE00/02436**

INTERNATIONAL FILING DATE

**July 19, 2000**

PRIORITY DATE CLAIMED

**August 13, 1999**

TITLE OF INVENTION

**CIRCUIT ARRANGEMENT FOR OPERATION OF A RELAY**

APPLICANT(S) FOR DO/EO/US

**Martin ROSSBACH**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application under PCT Article 19 (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).


Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information: 1) Application Data Sheet; 2) Int'l Search Report; 3) IPER; 4) Return receipt postcard.

**CERTIFICATE OF HAND DELIVERY**

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington, D.C. on February 13, 2002.

*Melissa Garton*  
Melissa Garton

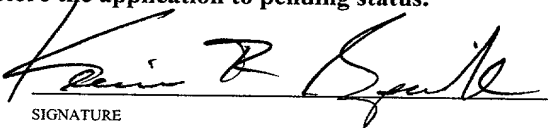U.S. APPLICATION NO. (if known, see 37 CFR 1.5) Not yet assigned <b>10/049459</b>		INTERNATIONAL APPLICATION NO. PCT/DE00/02436		ATTORNEY DOCKET NO. 449122023500	
21. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.....\$1,000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provision of PCT Article 33(1)-(4) .....\$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) .....\$100.00					<b>CALCULATIONS</b> PTO USE ONLY
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>					\$890.00
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).					\$0
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	- 20 =		x \$18.00	\$0	
Independent claims	- 3 =		x \$80.00	\$0	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$0	
<b>TOTAL OF ABOVE CALCULATIONS =</b>					\$890.00
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.					\$0
<b>SUBTOTAL =</b>					\$890.00
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).					\$0
<b>TOTAL NATIONAL FEE =</b>					\$890.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00 per property</b>					\$0
<b>TOTAL FEES ENCLOSED =</b>					\$890.00
					Amount to be refunded:
					\$
					charged:
					\$
a. <input checked="" type="checkbox"/> Please charge my <b>Deposit Account No. 03-1952</b> (referencing Docket No. 449122023500) in the amount of \$930.00 to cover the above fees. A duplicate copy of this sheet is enclosed.					
b. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment to <b>Deposit Account No. 03-1952</b> (referencing Docket No. 449122023500).					
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO:  Kevin R. Spivak Morrison & Foerster LLP 2000 Pennsylvania Avenue, N.W. Washington, D.C. 20006-1888					
 SIGNATURE					
Kevin R. Spivak Registration No. 43,148					
February 13, 2002					

## CERTIFICATE OF HAND DELIVERY

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington, D.C. on February 13, 2002.

  
Melissa Garton

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the application of:

Martin ROSSBACH

Serial No.: Not yet assigned

Filing Date: February 13, 2002

For: CIRCUIT ARRANGEMENT FOR  
OPERATION OF A RELAY

Examiner: Not yet assigned

Group Art Unit: Not yet assigned

## PRELIMINARY AMENDMENT

## BOX PCT

Commissioner for Patents  
Washington, D.C. 20231

Sir:

Prior to examination on the merits, please amend this application as follows:

**In the Specification:**

Page 1 before the first paragraph, please delete the following:

Description

Page 1, between lines 4 and 5, please insert the following headings and paragraph:

**CLAIM FOR PRIORITY**

This application claims priority to International Application No. PCT/DE00/02436 which was published in the German language on July 19, 2000.

**TECHNICAL FIELD OF THE INVENTION**

Please replace the paragraph beginning line 5 of page 1 with the following rewritten paragraph:

The invention relates to a circuit arrangement for operation of a relay, and in particular, to a current having a timer unit which provides a relay switching-on current for a time which is predetermined by the timer unit and which provides a relay holding current, which is less than the relay switching-on current for a subsequent holding period.

Page 1, between lines 11 and 12, please insert the following heading:

#### BACKGROUND OF THE INVENTION

Please replace the paragraph beginning line 12 of page 1 with the following rewritten paragraph:

U.S. Patent No. 5,107,391 discloses a circuit arrangement in which the current flowing through at least one relay (i.e. its field coil) is controlled by means of an electronic switch in the form of a field-effect transistor. When it is switched on, the relay is supplied with a holding current throughout its holding period. The magnitude of the holding current is governed by the duty ratio of electrical pulses which drive the electronic switch. The temperature of the relay is measured by means of a temperature sensor, and the voltage which is applied to the field coil of the relay is measured by means of a voltage sensor. These measurement variables, as well as information which is stored in a function memory and relates to the nominal values of the relay, are used to define the duty ratio of the pulses, and thus to define the magnitude of the holding current. The relay nominal values must therefore be known in order to properly operate the circuit. A voltage change which occurs on the field coil of the relay is used to identify that the relay has been switched on, and causes a timer unit to be started. This timer unit uses a continuous pulse to switch on the electronic switch, so that a switching-on current flows which is sufficient to ensure that the relay is switched on. Once the time which is predetermined by the timer unit, and which must be longer than the time required for the relay that is being used to be switched on has elapsed, the continuous pulse ends, and the holding current, which is governed by the duty ratio of the pulses, still flows through the relay.

Page 2, between lines 27 and 28, please insert the following heading:

#### SUMMARY OF THE INVENTION

Please replace the consecutive paragraphs beginning at line 28 of page 2 with the following rewritten paragraphs:

One embodiment of the invention discloses a circuit arrangement for operation of a relay. Discrepancies in the relay from its nominal values have no effect on the magnitude of the switching-on current and holding current, and need not be taken into account with regard to the size of the components in the circuit. Furthermore, it is possible to use the circuit, with one and the same relay, from operating voltages of different magnitude.

In this embodiment, the relay switching-on current and the relay holding current are constant currents, which are supplied from at least one constant current source. A constant current is thus used both as the relay switching-on current and as the relay holding current, whose magnitude is not influenced either by discrepancies in the relay from its nominal values or by operation of the circuit arrangement from operating voltages of different magnitude.

Please replace the consecutive paragraphs beginning at line 24 of page 3 with the following rewritten paragraphs:

In another embodiment of the invention, the circuit arrangement includes, for example, a first constant current source which provides the relay holding current during the time which is predetermined by the timer unit and during the subsequent holding period, and a second constant current source which provides a constant current, which is superimposed on the relay holding current in order to form the relay switching-on current, during the time which is predetermined by the timer unit. This has the advantage that relatively simple constant current sources can be used, whose constant currents need not be variable.

In one aspect of the invention, a switch, which is closed during the time that is predetermined by the timer unit, can advantageously be located in the current path of the constant current provided by the second constant current source. Once this time has elapsed, the switch is opened, thus making it easy to switch between the relay switching-on current and the relay holding current.

In another aspect of the invention, the timer unit and/or the switch may require an auxiliary voltage. A voltage drop across at least one electrical component that is connected in series with one of the constant current sources can advantageously be used for this auxiliary voltage.

In one embodiment, a resistor may be used as the electrical component. Since the current flowing through the resistor is constant, the voltage which is dropped across this resistor is also constant, and may be used as an auxiliary voltage.

In another embodiment, a zener diode can advantageously be used as the electrical component. A zener diode has the advantage that the voltage drop which occurs across it is constant even when the current flowing through the zener diode changes. By way of example, a situation may arise during operation of a relay which requires a change to the switching-on current and/or holding current, and hence appropriate changes to the constant currents. The advantage just mentioned is also applicable when series-connected diodes are used as electrical components.

Page 4, between lines 35 and 36, please insert the following heading:

#### BRIEF DESCRIPTION OF THE DRAWINGS

Please replace the paragraph beginning line 36 of page 4 with the following rewritten paragraph:

Figure 1 shows an exemplary embodiment of a circuit arrangement according to the invention for operation of a relay.

Figure 2 shows a diagram of the state of elements in the circuit arrangement, plotted against time.

Page 5, between lines 6 and 7, please insert the following heading:

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Please replace the consecutive paragraphs beginning line 7 of page 5 with the following rewritten paragraphs:

The circuit arrangement 1 illustrated in Figure 1 for operation of a relay is connected in series with a field coil SP of a relay. A voltage U is applied to the series circuit. The voltage U is a switching voltage, that is to say application of the voltage U is intended to cause the relay to switch. At the same time, the voltage U is used as the operating voltage for the circuit arrangement and the relay. As long as no switching voltage U is applied, the circuit arrangement is in a quiescent state with no current flowing, and a switch SCH is closed.

When the switching voltage U is applied, the circuit arrangement starts to operate. A constant current source KS1 drives a constant current IK1 through a zener diode ZD and through the field coil SP of the relay. Since the switch SCH is closed, a constant current source KS2 also drives a constant current IK2 through the switch. This current is added to the constant current IK1 at a node 2; a current whose magnitude is  $(IK1 + IK2)$  flows, as a

coil current ISP, through the field coil SP of the relay. The constant current source KS1 is designed such that it supplies a constant holding current. The constant current source KS2 supplies the difference to make up the necessary switching-on current for the relay; in this case, the difference is of precisely the same magnitude as the relay holding current. The switching-on current now flows through the field coil SP of the relay and the relay pulls in, that is to say it switches. The constant current IK1 which is flowing through the zener diode ZD results in an auxiliary voltage being dropped across the zener diode ZD, and this is supplied via the conductors 3 and 4 to a timer unit ZE as a supply voltage UH. When the switching voltage U is applied, the timer unit ZE starts to operate and, after an adjustable time which is greater than the switching-on time of the relay that is being used, opens the switch SCH via a link 5. Since the switch SCH is open, the constant current IK2 from the constant current source KS2 can no longer flow. Rather, the constant current IK1 from the constant current source KS1 flows through the field coil SP of the relay, as a holding current. This means that, once the switching-on process has been completed, the holding current is applied to the field coil SP and, in this case, this holding current is half the relay switching-on current.

Thus, during the switching-on process, the constant current IK1 from the constant current source KS1 and the constant current IK2 from the constant current source KS2 flow through the relay with the field coil SP. After completion of the switching-on process, the constant current IK1 from the constant current source KS1 flows through the relay. The magnitude of the currents IK1 and IK2 is governed by the constant current sources KS1 and KS2. Any discrepancies, for example between the coil parameters and their nominal values, do not influence the magnitude of the currents.

Since the currents IK1 and IK2 which are present are constant, the voltage drops across the field coil SP of the relay and across the zener diode ZD are also constant. If the circuit arrangement is operated with switching voltages U of different magnitude, then the difference between the switching voltage U and the voltage drops just mentioned is dropped across the constant current sources KS1 and KS2. The circuit arrangement can thus be operated from a switching voltage U which varies within wide limits but without any change to the magnitude of the relay switching-on current or the relay holding current.

Please replace the paragraph beginning line 36 of page 7 with the following rewritten paragraph:

The switching voltage is likewise applied to the circuit arrangement in the time interval between the times t2 and t3. The timer unit switches off the switch SCH at the

time  $t_2$ , and the current  $IK_1$ , which forms the holding current  $HS$ , flows through the relay, as the coil current  $ISP$ .

Please replace the paragraph beginning line 8 of page 8 with the following rewritten paragraph:

The circuit can drive a relay reliably over a wide temperature range, since the constant current sources  $KS_1$  and  $KS_2$  provide the constant currents  $IK_1$  and  $IK_2$  irrespective of the temperature level. Temperature-dependent changes in the resistance of the field coil  $SP$  likewise do not influence the current levels. Since the constant holding current during the holding period of the relay is less than the constant switching-on current (for example half of it), the circuit arrangement requires a fraction (for example approximately half) of the energy which would be required for operation just with a current of the same magnitude as the switching-on current. The power losses are reduced, the thermal loads on the relay are reduced, and the life of the relay coil is increased.

#### **In the Claims:**

##### **What is claimed is:**

1. (Amended) A circuit arrangement for operation of a relay, comprising a single voltage at which a relay switching-on current is provided for a time which is predetermined by the timer unit, and at which a relay holding current, which is less than the relay switching-on current, is provided for a subsequent holding period, wherein  
the single voltage is a switching voltage, and  
the relay switching-on current and the relay holding current are constant currents, which are supplied from at least one constant current source which is fed by the switching voltage.
2. (Amended) The circuit arrangement as claimed in claim 1, wherein a constant current source, whose constant current magnitude is variable, supplies both the relay switching-on current and the relay holding current.
3. (Amended) The circuit arrangement as claimed in claim 1, wherein a first constant current source provides the relay holding current during the time which is predetermined by the timer unit and during the subsequent holding period, and



a second constant current source provides a constant current, which is superimposed on the relay holding current in order to form the relay switching-on current, during the time which is predetermined by the timer unit.

4. (Amended) The circuit arrangement as claimed in claim 3, wherein a switch, which is located in a current path of the constant current provided by the second constant current source, and is closed during the time which is predetermined by the timer unit.

5. (Amended) The circuit arrangement as claimed in claim 1, wherein an auxiliary voltage, for operation of the timer unit, is dropped across at least one electrical component which is connected in series with one of the constant current sources.

6. (Amended) The circuit arrangement as claimed in claim 4, wherein an auxiliary voltage for operation of the switch is dropped across at least one electrical component which is connected in series with one of the constant current sources.

7. (Amended) The circuit arrangement as claimed in claim 5, wherein the electrical component is a resistor.

8. (Amended) The circuit arrangement as claimed in claim 5, wherein the electrical component is a zener diode.

9. (Amended) The circuit arrangement as claimed in claim 5, wherein the electrical components are series-connected diodes.

10. (Amended) The circuit arrangement as claimed in claim 1, wherein the two constant current sources provide constant currents of equal magnitude.

Please add the following new claims:

11. (New) The circuit arrangement as claimed in claim 6, wherein the electrical component is a resistor.

12. (New) The circuit arrangement as claimed in claim 6, wherein the electrical component is a zener diode.

- 1870  
 1871  
 1872  
 1873  
 1874  
 1875  
 1876  
 1877  
 1878  
 1879  
 1880  
 1881  
 1882  
 1883  
 1884  
 1885  
 1886  
 1887  
 1888  
 1889  
 1890  
 1891  
 1892  
 1893  
 1894  
 1895  
 1896  
 1897  
 1898  
 1899  
 1900  
 1901  
 1902  
 1903  
 1904  
 1905  
 1906  
 1907  
 1908  
 1909  
 1910  
 1911  
 1912  
 1913  
 1914  
 1915  
 1916  
 1917  
 1918  
 1919  
 1920  
 1921  
 1922  
 1923  
 1924  
 1925  
 1926  
 1927  
 1928  
 1929  
 1930  
 1931  
 1932  
 1933  
 1934  
 1935  
 1936  
 1937  
 1938  
 1939  
 1940  
 1941  
 1942  
 1943  
 1944  
 1945  
 1946  
 1947  
 1948  
 1949  
 1950  
 1951  
 1952  
 1953  
 1954  
 1955  
 1956  
 1957  
 1958  
 1959  
 1960  
 1961  
 1962  
 1963  
 1964  
 1965  
 1966  
 1967  
 1968  
 1969  
 1970  
 1971  
 1972  
 1973  
 1974  
 1975  
 1976  
 1977  
 1978  
 1979  
 1980  
 1981  
 1982  
 1983  
 1984  
 1985  
 1986  
 1987  
 1988  
 1989  
 1990  
 1991  
 1992  
 1993  
 1994  
 1995  
 1996  
 1997  
 1998  
 1999  
 2000  
 2001  
 2002  
 2003  
 2004  
 2005  
 2006  
 2007  
 2008  
 2009  
 2010  
 2011  
 2012  
 2013  
 2014  
 2015  
 2016  
 2017  
 2018  
 2019  
 2020  
 2021  
 2022  
 2023  
 2024  
 2025  
 2026  
 2027  
 2028  
 2029  
 2030  
 2031  
 2032  
 2033  
 2034  
 2035  
 2036  
 2037  
 2038  
 2039  
 2040  
 2041  
 2042  
 2043  
 2044  
 2045  
 2046  
 2047  
 2048  
 2049  
 2050  
 2051  
 2052  
 2053  
 2054  
 2055  
 2056  
 2057  
 2058  
 2059  
 2060  
 2061  
 2062  
 2063  
 2064  
 2065  
 2066  
 2067  
 2068  
 2069  
 2070  
 2071  
 2072  
 2073  
 2074  
 2075  
 2076  
 2077  
 2078  
 2079  
 2080  
 2081  
 2082  
 2083  
 2084  
 2085  
 2086  
 2087  
 2088  
 2089  
 2090  
 2091  
 2092  
 2093  
 2094  
 2095  
 2096  
 2097  
 2098  
 2099  
 2100  
 2101  
 2102  
 2103  
 2104  
 2105  
 2106  
 2107  
 2108  
 2109  
 2110  
 2111  
 2112  
 2113  
 2114  
 2115  
 2116  
 2117  
 2118  
 2119  
 2120  
 2121  
 2122  
 2123  
 2124  
 2125  
 2126  
 2127  
 2128  
 2129  
 2130  
 2131  
 2132  
 2133  
 2134  
 2135  
 2136  
 2137  
 2138  
 2139  
 2140  
 2141  
 2142  
 2143  
 2144  
 2145  
 2146  
 2147  
 2148  
 2149  
 2150  
 2151  
 2152  
 2153  
 2154  
 2155  
 2156  
 2157  
 2158  
 2159  
 2160  
 2161  
 2162  
 2163  
 2164  
 2165  
 2166  
 2167  
 2168  
 2169  
 2170  
 2171  
 2172  
 2173  
 2174  
 2175  
 2176  
 2177  
 2178  
 2179  
 2180  
 2181  
 2182  
 2183  
 2184  
 2185  
 2186  
 2187  
 2188  
 2189  
 2190  
 2191  
 2192  
 2193  
 2194  
 2195  
 2196  
 2197  
 2198  
 2199  
 2200  
 2201  
 2202  
 2203  
 2204  
 2205  
 2206  
 2207  
 2208  
 2209  
 2210  
 2211  
 2212  
 2213  
 2214  
 2215  
 2216  
 2217  
 2218  
 2219  
 2220  
 2221  
 2222  
 2223  
 2224  
 2225  
 2226  
 2227  
 2228  
 2229  
 2230  
 2231  
 2232  
 2233  
 2234  
 2235  
 2236  
 2237  
 2238  
 2239  
 2240  
 2241  
 2242  
 2243  
 2244  
 2245  
 2246  
 2247  
 2248  
 2249  
 2250  
 2251  
 2252  
 2253  
 2254  
 2255  
 2256  
 2257  
 2258  
 2259  
 2260  
 2261  
 2262  
 2263  
 2264  
 2265  
 2266  
 2267  
 2268  
 2269  
 2270  
 2271  
 2272  
 2273  
 2274  
 2275  
 2276  
 2277  
 2278  
 2279  
 2280  
 2281  
 2282  
 2283  
 2284  
 2285  
 2286  
 2287  
 2288  
 2289  
 2290  
 2291  
 2292  
 2293  
 2294  
 2295  
 2296  
 2297  
 2298  
 2299  
 2300  
 2301  
 2302  
 2303  
 2304  
 2305  
 2306  
 2307  
 2308  
 2309  
 2310  
 2311  
 2312  
 2313  
 2314  
 2315  
 2316  
 2317  
 2318  
 2319  
 2320  
 2321  
 2322  
 2323  
 2324

**In the Abstract:**

Please replace the Abstract with the substitute Abstract attached hereto.

## REMARKS


The above amendments to the specification, claims, and abstract have been made to place the application in proper U.S. format and to conform with proper grammatical and idiomatic English. None of the amendments herein are made for reasons related to patentability. No new matter has been added.

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned "Version with markings to show changes made".

In the unlikely event that the transmittal letter is separated from this document and the Patent Office determines that an extension and/or other relief is required, applicant petitions for any required relief including extensions of time and authorizes the Commissioner to charge the cost of such petitions and/or other fees due in connection with the filing of this document to Deposit Account No. 03-1952 referencing docket no. 449122023500. However, the Commissioner is not authorized to charge the cost of the issue fee to the Deposit Account.

Respectfully submitted,

Dated: February 13, 2002

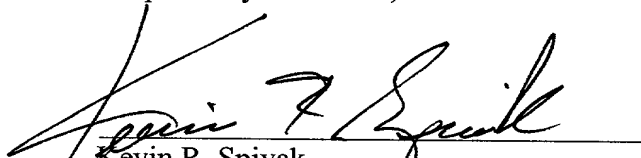  
Kevin R. Spivak  
Registration No. 43,148

Morrison & Foerster LLP  
2000 Pennsylvania Avenue, N.W.  
Washington, D.C. 20006-1888  
Telephone: (202) 887-6924  
Facsimile: (202) 263-8396

## VERSION WITH MARKINGS TO SHOW CHANGES MADE

For the convenience of the Examiner, the changes made are shown below with deleted text in strikethrough and added text in underline.

### In the Specification:

Page 1 before the first paragraph, please delete the following:

~~Description~~

Page 1, between lines 4 and 5, please insert the following headings and paragraph:

#### CLAIM FOR PRIORITY

This application claims priority to International Application No. PCT/DE00/02436 which was published in the German language on July 19, 2000.

#### TECHNICAL FIELD OF THE INVENTION

Please replace the paragraph beginning line 5 of page 1 with the following rewritten paragraph:

The invention relates to a circuit arrangement for operation of a relay, and in particular, to a current having a timer unit which provides a relay switching-on current for a time which is predetermined by the timer unit, and which provides a relay holding current, which is less than the relay switching-on current for a subsequent holding period.

Page 1, between lines 11 and 12, please insert the following heading:

#### BACKGROUND OF THE INVENTION

Please replace the paragraph beginning line 12 of page 1 with the following rewritten paragraph:

~~A circuit arrangement such as this is specified in US Patent Specification U.S. Patent No. 5,107,391~~ discloses a circuit arrangement in which the current. Here, the ~~current which flows~~ flowing through at least one relay (that is to say through i.e. its field coil) is controlled by means of an electronic switch in the form of a field-effect transistor. When it is switched on, the relay is supplied with a holding current throughout its holding period. The magnitude of the holding current is governed by the duty ratio of electrical

pulses which drive the electronic switch. The temperature of the relay is measured by means of a temperature sensor, and the voltage which is applied to the field coil of the relay is measured by means of a voltage sensor. These measurement variables, as well as information which is stored in a function memory and relates to the nominal values of the relay, are used to define the duty ratio of the pulses, and thus to define the magnitude of the holding current. The relay nominal values must therefore be known ~~for operation of in order to properly operate~~ the circuit. A voltage change which occurs on the field coil of the relay is used to identify that the relay has been switched on, and causes a timer unit to be started. This timer unit uses a continuous pulse to switch on the electronic switch, so that a switching-on current flows which is sufficient to ensure that the relay is switched on. Once the time which is predetermined by the timer unit, and which must be longer than the time required for the relay that is being used to be switched on has elapsed, the continuous pulse ends, and ~~only~~ the holding current, which is governed by the duty ratio of the pulses, still flows through the relay.

Page 2, between lines 27 and 28, please insert the following heading:

#### SUMMARY OF THE INVENTION

Please replace the consecutive paragraphs beginning at line 28 of page 2 with the following rewritten paragraphs:

~~The One embodiment of the invention is based on the object of specifying~~  
~~discloses~~ a circuit arrangement for operation of a relay, ~~in which discrepancies.~~  
Discrepancies in the relay from its nominal values have no effect on the magnitude of the switching-on current and holding current, and need not be taken into account with regard to the ~~sizes~~ size of the components in the circuit. Furthermore, it ~~should be~~ is possible to use the circuit, with one and the same relay, from operating voltages of different magnitude.

~~In the case of a circuit arrangement of the type mentioned initially, this object is achieved according to the invention in that~~ In this embodiment, the relay switching-on current and the relay holding current are constant currents, which are supplied from at least one constant current source. A constant current is thus used both as the relay switching-on current and as the relay holding current, whose magnitude is not influenced either by discrepancies in the relay from its nominal values or by operation of the circuit arrangement from operating voltages of different magnitude.

Please replace the consecutive paragraphs beginning at line 24 of page 3 with the following rewritten paragraphs:

~~The~~ In another embodiment of the invention, the circuit arrangement includes, for example, can also be designed such that a first constant current source which provides the relay holding current during the time which is predetermined by the timer unit and during the subsequent holding period, and ~~in that~~ a second constant current source which provides a constant current, which is superimposed on the relay holding current in order to form the relay switching-on current, during the time which is predetermined by the timer unit. This has the advantage that relatively simple constant current sources can be used, whose constant currents need not be variable.

A In one aspect of the invention, a switch, which is closed during the time that is predetermined by the timer unit, can advantageously be located in the current path of the constant current provided by the second constant current source. Once this time has elapsed, the switch is opened, thus making it easy to switch between the relay switching-on current and the relay holding current.

~~The~~ In another aspect of the invention, the timer unit and/or the switch may require an auxiliary voltage. A voltage drop across at least one electrical component that is connected in series with one of the constant current sources can advantageously be used for this auxiliary voltage.

By way of example In one embodiment, a resistor may be used as the electrical component. Since the current flowing through the resistor is constant, the voltage which is dropped across this resistor is also constant, and may be used as an auxiliary voltage.

A In another embodiment, a zener diode can likewise advantageously be used as the electrical component. A zener diode has the advantage that the voltage drop which occurs across it is constant even when the current flowing through the zener diode changes. By way of example, a situation may arise during operation of a relay which requires a change to the switching-on current and/or holding current, and hence appropriate changes to the constant currents. The advantage just mentioned is also applicable when series-connected diodes are used as electrical components.

Page 4, between lines 35 and 36, please insert the following heading:

#### BRIEF DESCRIPTION OF THE DRAWINGS

Please replace the paragraph beginning line 36 of page 4 with the following rewritten paragraph:

~~For further explanation:~~

Figure 1 shows an exemplary embodiment of a circuit arrangement according to the invention for operation of a relay, ~~and~~.

Figure 2 shows a diagram of the state of elements in the circuit arrangement, plotted against time.

Page 5, between lines 6 and 7, please insert the following heading:

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Please replace the consecutive paragraphs beginning line 7 of page 5 with the following rewritten paragraphs:

The circuit arrangement 1 illustrated in Figure 1 for operation of a relay is connected in series with a field coil SP of a relay; ~~a.~~ A voltage U is applied to the series circuit. The voltage U is a switching voltage, that is to say application of the voltage U is intended to cause the relay to switch. At the same time, the voltage U is used as the operating voltage for the circuit arrangement and the relay. As long as no switching voltage U is applied, the circuit arrangement is in a quiescent state with no current flowing, and a switch SCH is closed.

When the switching voltage U is applied, the circuit arrangement starts to operate. A constant current source KS1 drives a constant current IK1 through a zener diode ZD and through the field coil SP of the relay. Since the switch SCH is closed, a constant current source KS2 also drives a constant current IK2 through the switch. This current is added to the constant current IK1 at a node 2; a current whose magnitude is  $(IK1 + IK2)$  flows, as a coil current ISP, through the field coil SP of the relay. The constant current source KS1 is designed such that it supplies a constant holding current. The constant current source KS2 supplies the difference to make up the necessary switching-on current for the relay; in this case, the difference is of precisely the same magnitude as the relay holding current. The switching-on current now flows through the field coil SP of the relay and the relay pulls in, that is to say it switches. The constant current IK1 which is flowing through the zener diode ZD results in an auxiliary voltage being dropped across the zener diode ZD, and this is supplied via the conductors 3 and 4 to a timer unit ZE as a supply voltage UH. When the switching voltage U is applied, the timer unit ZE starts to operate and, after an adjustable time which ~~must be~~ is greater than the switching-on time of the relay that is

being used, opens the switch SCH via a link 5. Since the switch SCH Since the switch SCH is open, the constant current IK2 from the constant current source KS2 can no longer flow; ~~only~~. Rather, the constant current IK1 from the constant current source KS1 ~~now~~ still flows through the field coil SP of the relay, as a holding current. This means that, once the switching-on process has been completed, ~~only~~ the holding current is still applied to the field coil SP and, in this case, this holding current is half the relay switching-on current.

Thus, during the switching-on process, the constant current IK1 from the constant current source KS1 and the constant current IK2 from the constant current source KS2 flow through the relay with the field coil SP. After completion of the switching-on process, ~~only~~ the constant current IK1 from the constant current source KS1 still flows through the relay. The magnitude of the currents IK1 and IK2 is governed by the constant current sources KS1 and KS2; ~~any~~. Any discrepancies, for example between the coil parameters and their nominal values, ~~have no~~ do not influence ~~on~~ the magnitude of the currents.

Since the currents IK1 and IK2 which are present are constant, the voltage drops across the field coil SP of the relay and across the zener diode ZD are also constant. If the circuit arrangement is operated with switching voltages U of different magnitude, then the difference between the switching voltage U and the voltage drops just mentioned is dropped across the constant current sources KS1 and KS2. ~~It is thus possible to operate~~ The circuit arrangement can thus be operated from a switching voltage U which varies within wide limits but without any change to the magnitude of the relay switching-on current or the relay holding current.

Please replace the paragraph beginning line 36 of page 7 with the following rewritten paragraph:

The switching voltage is likewise applied to the circuit arrangement in the time interval between the times t2 and t3. The timer unit switches off the switch SCH at the time t2, and ~~only~~ the current IK1, which forms the holding current HS, still flows through the relay, as the coil current ISP.

Please replace the paragraph beginning line 8 of page 8 with the following rewritten paragraph:

The circuit can drive a relay reliably over a wide temperature range, since the constant current sources KS1 and KS2 provide the constant currents IK1 and IK2



irrespective of the temperature level. Temperature-dependent changes in the resistance of the field coil SP likewise ~~have no~~ do not influence ~~on~~ the current levels. Since the constant holding current during the holding period of the relay is less than the constant switching-on current (for example half of it), the circuit arrangement requires ~~only~~ a fraction (for example approximately half) of the energy which would be required for operation just with a current of the same magnitude as the switching-on current. The power losses are reduced, the thermal loads on the relay are reduced, and the life of the relay coil is increased.

### **In the Claims:**

#### **Patent Claims**

##### **What is claimed is:**

1. (Amended) A circuit arrangement ~~(1)~~ for operation of a relay, comprising having a single voltage at which a relay switching-on current ~~(ES)~~ is provided for a time ~~(At1)~~ which is predetermined by the timer unit ~~(ZE)~~, and at which a relay holding current ~~(HS)~~, which is less than the relay switching-on current ~~(ES)~~, is provided for a subsequent holding period ~~(At2)~~, wherein characterized in that  
the single voltage is a switching voltage, and that  
the relay switching-on current ~~(ES)~~ and the relay holding current ~~(HS)~~ are constant currents, which are supplied from at least one constant current source ~~(KS1, KS2)~~ which is fed by the switching voltage.
2. (Amended) The circuit arrangement as claimed in claim 1, wherein characterized in that  
a constant current source, whose constant current magnitude is variable, supplies both the relay switching-on current ~~(ES)~~ and the relay holding current ~~(HS)~~.
3. (Amended) The circuit arrangement as claimed in claim 1, wherein characterized in that  
a first constant current source ~~(KS1)~~ provides the relay holding current ~~(HS)~~ during the time ~~(At1)~~ which is predetermined by the timer unit ~~(ZE)~~ and during the subsequent holding period ~~(At2)~~, and  
in that a second constant current source ~~(KS2)~~ provides a constant current ~~(IK2)~~, which is superimposed on the relay holding current ~~(HS)~~ in order to form the relay

switching-on current (~~ES~~), during the time ( $\Delta t$ ) which is predetermined by the timer unit (~~ZE~~).

4. (Amended) The circuit arrangement as claimed in claim 3, wherein ~~characterized by a switch (SCH), which is located in the a current path of the constant current (IK2) provided by the second constant current source (KS2), and is closed during the time (t1) which is predetermined by the timer unit (ZE).~~

5. (Amended) The circuit arrangement as claimed in ~~one of claims 1 to 4,~~ characterized in that claim 1, wherein  
an auxiliary voltage (~~UH~~), for operation of the timer unit (~~ZE~~), is dropped across at least one electrical component which is connected in series with one of the constant current sources (~~KS1, KS2~~).

6. (Amended) The circuit arrangement as claimed in claim 4, wherein ~~characterized in that~~  
an auxiliary voltage (~~UH~~) for operation of the switch (~~SCH~~) is dropped across at least one electrical component which is connected in series with one of the constant current sources (~~KS1, KS2~~).

7. (Amended) The circuit arrangement as claimed in claim 5 ~~or 6,~~ wherein ~~characterized in that~~  
the electrical component is a resistor.

8. (Amended) The circuit arrangement as claimed in claim 5 ~~or 6,~~ wherein ~~characterized in that~~  
the electrical component is a zener diode (~~ZD~~).

9. (Amended) The circuit arrangement as claimed in claim 5 ~~or 6,~~ wherein ~~characterized in that~~  
the electrical components are series-connected diodes.

10. (Amended) The circuit arrangement as claimed in ~~one of claims 3 to 9,~~ characterized in that claim 1, wherein

the two constant current sources (~~KS1, KS2~~) provide constant currents (~~IK1, IK2~~) of equal magnitude.

Please add the following new claims:

11. (New) The circuit arrangement as claimed in claim 6, wherein the electrical component is a resistor.
12. (New) The circuit arrangement as claimed in claim 6, wherein the electrical component is a zener diode.
13. (New) The circuit arrangement as claimed in claim 6, wherein the electrical components are series-connected diodes.

**In the Abstract:**

Please replace the Abstract with the substitute Abstract attached hereto.

## CIRCUIT ARRANGEMENT FOR OPERATION OF A RELAY

### Abstract

The invention relates to a circuit arrangement for operation of a relay which provides a switching-on current for the field coil of the relay and subsequently, after a predetermined time, a holding current. In order that any possible discrepancies in the parameters of the relay from their nominal values have no negative influence and need not be taken into account when designing the circuit, and in order that the circuit arrangement can be used with operating voltages of different magnitude, at least one constant current source supplies the relay switching-on current and the relay holding current.

1/Pt 2

- 1 -

## Description

Circuit arrangement for operation of a relay

5 The invention relates to a circuit arrangement for operation of a relay, having a timer unit which provides a relay switching-on current for a time which is predetermined by the timer unit, and which provides a relay holding current, which is less than the relay  
10 switching-on current for a subsequent holding period.

A circuit arrangement such as this is specified in US Patent Specification 5,107,391. Here, the current which flows through at least one relay (that is to say  
15 through its field coil) is controlled by means of an electronic switch in the form of a field-effect transistor. When it is switched on, the relay is supplied with a holding current throughout its holding period. The magnitude of the holding current is  
20 governed by the duty ratio of electrical pulses which drive the electronic switch. The temperature of the relay is measured by means of a temperature sensor, and the voltage which is applied to the field coil of the relay is measured by means of a voltage sensor. These  
25 measurement variables as well as information which is stored in a function memory and relates to the nominal values of the relay are used to define the duty ratio of the pulses, and thus to define the magnitude of the holding current. The relay nominal values must  
30 therefore be known for operation of the circuit. A voltage change which occurs on the field coil of the relay is used to identify that the relay has been switched on, and causes a timer unit to be started. This timer unit uses a continuous pulse to switch on  
35 the electronic switch, so that a switching-on current flows which is sufficient to ensure that the relay is switched on. Once the time which is predetermined by the timer unit, and which must be longer than the time

required for the relay that is being used to be switched on has elapsed, the continuous pulse ends, and only the holding current, which is governed by the duty ratio of the pulses, still flows through the relay.

5

In order to ensure that a sufficient holding current flows to hold the relay in the switched-on state, the circuit takes account of the voltage across the field coil, the temperature and the nominal values for the relay. Individual discrepancies from the nominal values for the relay, in particular discrepancies in the coil resistance, are ignored, however. Discrepancies such as these can occur, for example, during the manufacture of the relay, due to aging processes during operation, or due to oxidation of conductors and contacts of the field coil.

Furthermore, although the circuit is able to take account of fluctuations in the operating voltage by measuring the voltage across the field coil of the relay, the circuit is, however, intended for operation from a voltage source with a predetermined nominal voltage, for example from a motor vehicle battery with a voltage of 12 V. Circuits with components of different sizes are therefore required to operate relays from different operating voltages.

The invention is based on the object of specifying a circuit arrangement for operation of a relay, in which discrepancies in the relay from its nominal values have no effect on the magnitude of the switching-on current and holding current, and need not be taken into account with regard to the sizes of the components in the circuit. Furthermore, it should be possible to use the circuit, with one and the same relay, from operating voltages of different magnitude.

In the case of a circuit arrangement of the type mentioned initially, this object is achieved according to the invention in that

the relay switching-on current and the relay holding current are constant currents, which are supplied from at least one constant current source. A constant current is thus used both as the relay switching-on current and as the relay holding current, whose magnitude is not influenced either by discrepancies in the relay from its nominal values or by operation of the circuit arrangement from operating voltages of different magnitude.

A constant current source whose constant current magnitude is variable can be used to supply the constant relay switching-on current and the constant, lower relay holding current. The constant current source supplies the relay switching-on current from the start of the switching-on process. Once the relay has been switched on and the time which is predetermined by the timer unit has elapsed, the constant current is reduced to the relay holding current.

The circuit arrangement can also be designed such that a first constant current source provides the relay holding current during the time which is predetermined by the timer unit and during the subsequent holding period, and in that a second constant current source provides a constant current, which is superimposed on the relay holding current in order to form the relay switching-on current, during the time which is predetermined by the timer unit. This has the advantage that relatively simple constant current sources can be used, whose constant currents need not be variable.

35

A switch, which is closed during the time that is predetermined by the timer unit, can advantageously be located in the current path of the constant current

provided by the second constant current source. Once this time has elapsed, the switch is opened, thus making it easy to switch between the relay switching-on current and the relay holding current.

5

The timer unit and/or the switch may require an auxiliary voltage. A voltage drop across at least one electrical component that is connected in series with one of the constant current sources can advantageously  
10 be used for this auxiliary voltage.

By way of example, a resistor may be used as the electrical component. Since the current flowing through the resistor is constant, the voltage which is dropped  
15 across this resistor is also constant, and may be used as an auxiliary voltage.

A zener diode can likewise advantageously be used as the electrical component. A zener diode has the  
20 advantage that the voltage drop which occurs across it is constant even when the current flowing through the zener diode changes. By way of example, a situation may arise during operation of a relay which requires a change to the switching-on current and/or holding  
25 current, and hence appropriate changes to the constant currents. The advantage just mentioned is also applicable when series-connected diodes are used as electrical components.

30 In the circuit arrangement according to the invention, both constant current sources may, for example, supply a constant current of the same magnitude. In this case, the relay switching-on current is twice the magnitude of the relay holding current.

35

For further explanation:



Figure 1 shows an exemplary embodiment of a circuit arrangement according to the invention for operation of a relay, and

Figure 2 shows a diagram of the state of elements in  
5 the circuit arrangement, plotted against time.

The circuit arrangement 1 illustrated in Figure 1 for operation of a relay is connected in series with a field coil SP of a relay; a voltage U is applied to the series circuit. The voltage U is a switching voltage,  
10 that is to say application of the voltage U is intended to cause the relay to switch. At the same time, the voltage U is used as the operating voltage for the circuit arrangement and the relay. As long as no  
15 switching voltage U is applied, the circuit arrangement is in a quiescent state with no current flowing, and a switch SCH is closed.

When the switching voltage U is applied, the circuit  
20 arrangement starts to operate. A constant current source KS1 drives a constant current IK1 through a zener diode ZD and through the field coil SP of the relay. Since the switch SCH is closed, a constant current source KS2 also drives a constant current IK2  
25 through the switch. This current is added to the constant current IK1 at a node 2; a current whose magnitude is  $(IK1 + IK2)$  flows, as a coil current ISP, through the field coil SP of the relay. The constant current source KS1 is designed such that it supplies a  
30 constant holding current. The constant current source KS2 supplies the difference to make up the necessary switching-on current for the relay; in this case, the difference is of precisely the same magnitude as the relay holding current. The switching-on current now  
35 flows through the field coil SP of the relay and the relay pulls in, that is to say it switches. The constant current IK1 which is flowing through the zener diode ZD results in an auxiliary voltage being dropped

across the zener diode ZD, and this is supplied via the conductors 3 and 4 to a timer unit ZE as a supply voltage UH. When the switching voltage U is applied, the timer unit ZE starts to operate and, after an  
5 adjustable time which must be greater than the switching-on time of the relay that is being used, opens the switch SCH via a link 5. Since the switch SCH is open, the constant current IK2 from the constant current source KS2 can no longer  
10 flow; only the constant current IK1 from the constant current source KS1 now still flows through the field coil SP of the relay, as a holding current. This means that, once the switching-on process has been completed, only the holding current is still applied to the field  
15 coil SP and, in this case, this holding current is half the relay switching-on current.

Thus, during the switching-on process, the constant current IK1 from the constant current source KS1 and  
20 the constant current IK2 from the constant current source KS2 flow through the relay with the field coil SP. After completion of the switching-on process, only the constant current IK1 from the constant current source KS1 still flows through the relay. The magnitude  
25 of the currents IK1 and IK2 is governed by the constant current sources KS1 and KS2; any discrepancies, for example between the coil parameters and their nominal values, have no influence on the magnitude of the currents.

30

Since the currents IK1 and IK2 which are present are constant, the voltage drops across the field coil SP of the relay and across the zener diode ZD are also constant. If the circuit arrangement is operated with  
35 switching voltages U of different magnitude, then the difference between the switching voltage U and the voltage drops just mentioned is dropped across the constant current sources KS1 and KS2. It is thus

possible to operate the circuit arrangement from a switching voltage U which varies within wide limits but without any change to the magnitude of the relay switching-on current or the relay holding current.

5

When the circuit is disconnected from the switching voltage U, the circuit changes back to its quiescent state, with no current flowing. The timer unit ZE is reset, and the switch SCH is closed. The relay changes  
10 back to its quiescent position. Immediately after completion of these processes, the circuit can be actuated by applying a switching voltage U once again.

The state of the switching voltage U is shown at the  
15 top of the diagram in Figure 2, with the state of the output from the timer unit ZE being shown underneath this, followed by the state of the switch SCH and, underneath this, the profile of the coil current ISP, plotted against time. Three times t1, t2 and t3 are  
20 marked on a horizontal time axis. The switching voltage U is applied to the circuit arrangement at the time t1; the time (t1), which is predetermined by the timer unit ZE, lapses at the time t2, and the circuit arrangement is disconnected from the switching voltage U once again  
25 at the time t3.

During the time interval between the times t1 and t2, the switching voltage U is applied to the circuit arrangement, the timer unit is operating, and the time  
30 which is predetermined by the timer unit is counting down; the switch is switched on, and a coil current ISP, which is composed of the sum of the constant currents IK1 and IK2, flows through the relay. This coil current is the switching-on current ES.

35

The switching voltage is likewise applied to the circuit arrangement in the time interval between the times t2 and t3. The timer unit switches off the switch

SCH at the time  $t_2$ , and only the current  $IK_1$ , which forms the holding current  $HS$ , still flows through the relay, as the coil current  $ISP$ .

- 5 The circuit is in the quiescent state, with no current flowing, at times before  $t_1$  and at times after  $t_3$ .

The circuit can drive a relay reliably over a wide temperature range, since the constant current sources  
10  $KS_1$  and  $KS_2$  provide the constant currents  $IK_1$  and  $IK_2$  irrespective of the temperature level. Temperature-dependent changes in the resistance of the field coil  $SP$  likewise have no influence on the current levels. Since the constant holding current during the holding  
15 period of the relay is less than the constant switching-on current (for example half of it), the circuit arrangement requires only a fraction (for example approximately half) of the energy which would be required for operation just with a current of the  
20 same magnitude as the switching-on current. The power losses are reduced, the thermal loads on the relay are reduced, and the life of the relay coil is increased.

Patent claims

1. A circuit arrangement (1) for operation of a relay, having a single voltage at which a relay switching-on current (ES) is provided for a time ( $\Delta t_1$ ) which is predetermined by the timer unit (ZE), and at which a relay holding current (HS), which is less than the relay switching-on current (ES), is provided for a subsequent holding period ( $\Delta t_2$ ), characterized in that

- the single voltage is a switching voltage and that
- the relay switching-on current (ES) and the relay holding current (HS) are constant currents, which are supplied from at least one constant current source (KS1, KS2) which is fed by the switching voltage.

2. The circuit arrangement as claimed in claim 1, characterized in that a constant current source, whose constant current magnitude is variable, supplies both the relay switching-on current (ES) and the relay holding current (HS).

3. The circuit arrangement as claimed in claim 1, characterized in that a first constant current source (KS1) provides the relay holding current (HS) during the time ( $\Delta t_1$ ) which is predetermined by the timer unit (ZE) and during the subsequent holding period ( $\Delta t_2$ ), and in that a second constant current source (KS2) provides a constant current (IK2), which is superimposed on the relay holding current (HS) in order to form the relay switching-on current (ES), during the time ( $\Delta t_1$ ) which is predetermined by the timer unit (ZE).

4. The circuit arrangement as claimed in claim 3, characterized by a switch (SCH), which is located in the current path of the constant current (IK2) provided by the second constant current source (KS2), and is closed during the time (t1) which is predetermined by the timer unit (ZE).

5. The circuit arrangement as claimed in one of claims 1 to 4, characterized in that an auxiliary voltage (UH), for operation of the timer unit (ZE), is dropped across at least one electrical component which is connected in series with one of the constant current sources (KS1, KS2).

6. The circuit arrangement as claimed in claim 4, characterized in that an auxiliary voltage (UH) for operation of the switch (SCH) is dropped across at least one electrical component which is connected in series with one of the constant current sources (KS1, KS2).

7. The circuit arrangement as claimed in claim 5 or 6, characterized in that the electrical component is a resistor.

8. The circuit arrangement as claimed in claim 5 or 6, characterized in that the electrical component is a zener diode (ZD).

9. The circuit arrangement as claimed in claim 5 or 6, characterized in that the electrical components are series-connected diodes.

10. The circuit arrangement as claimed in one of claims 3 to 9, characterized in that the two constant current sources (KS1, KS2) provide constant currents (IK1, IK2) of equal magnitude.

## Abstract

### Circuit arrangement for operation of a relay

The invention relates to a circuit arrangement (1) for operation of a relay which provides a switching-on current (ES) for the field coil (SP) of the relay and subsequently, after a predetermined time ( $t_1$ ), a holding current (HS). In order that any possible discrepancies in the parameters of the relay from their nominal values have no negative influence and need not be taken into account when designing the circuit, and in order that the circuit arrangement can be used with operating voltages (U) of different magnitude, at least one constant current source (KS1, KS2) supplies the relay switching-on current (ES) and the relay holding current (HS).

FIGURE 1



99 P 4142

1/1

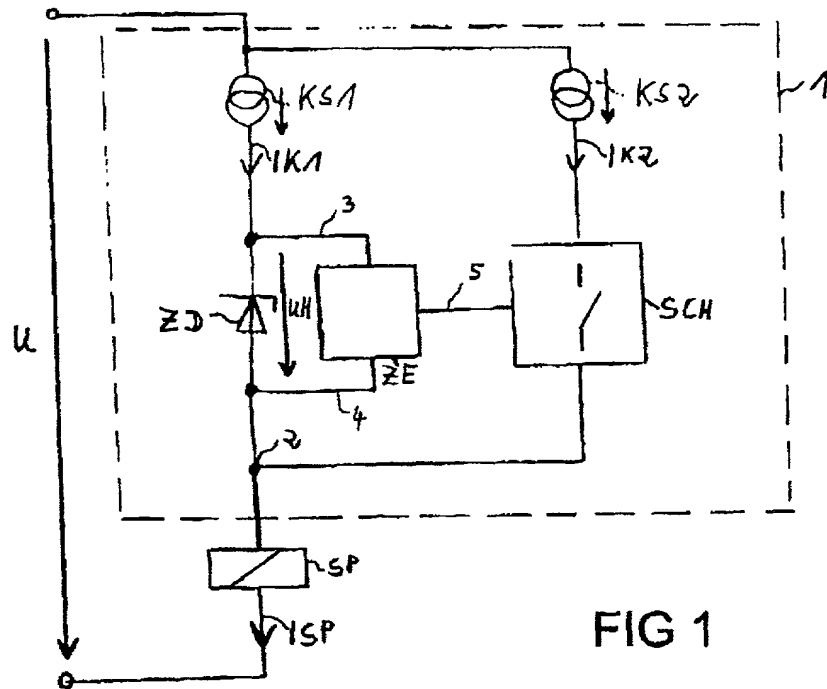


FIG 1

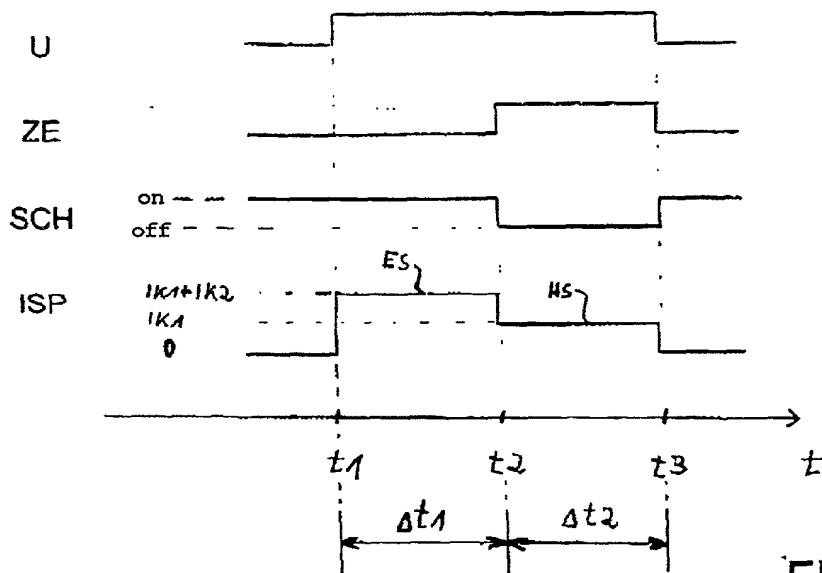


FIG 2

# Declaration and Power of Attorney For Patent Application

## *Erklärung Für Patentanmeldungen Mit Vollmacht*

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

#### Schaltungsanordnung zum Betrieb eines Relais

#### CIRCUIT ARRANGEMENT FOR OPERATING A RELAY

deren Beschreibung

the specification of which

(zutreffendes ankreuzen)

☐ hier beigefügt ist.

☒ am 19. Juli 2000 als

PCT internationale Anmeldung

PCT Anmeldungsnummer \_\_\_\_\_

eingereicht wurde und am \_\_\_\_\_

abgeändert wurde (falls tatsächlich abgeändert).

(check one)

☐ is attached hereto.

☒ was filed on \_\_\_\_\_ as

PCT international application

PCT Application No. \_\_\_\_\_

and was amended on \_\_\_\_\_ (if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

# German Language Declaration

Prior foreign applications

Priorität beansprucht

Priority Claimed

19939650.7

(Number)  
(Nummer)

DE

(Country)  
(Land)

1999.08.13

(Day Month Year Filed)  
(Tag Monat Jahr eingereicht)

☒

Yes  
Ja

☐

No  
Nein

(Number)  
(Nummer)

(Country)  
(Land)

(Day Month Year Filed)  
(Tag Monat Jahr eingereicht)

☐

Yes  
Ja

☐

No  
Nein

(Number)  
(Nummer)

(Country)  
(Land)

(Day Month Year Filed)  
(Tag Monat Jahr eingereicht)

☐

Yes  
Ja

☐

No  
Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE00/02436

(Application Serial No.)  
(Anmeldeseriennummer)

19. Juli 2000

(Filing Date D, M, Y)  
(Anmeldedatum T, M, J)

anhängig

(Status)  
(patentiert, anhängig,  
aufgegeben)

pending

(Status)  
(patented, pending,  
abandoned)

(Application Serial No.)  
(Anmeldeseriennummer)

(Filing Date D,M,Y)  
(Anmeldedatum T, M, J)

(Status)  
(patentiert, anhängig,  
aufgeben)

(Status)  
(patented, pending,  
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## German Language Declaration

**VERTRETUNGSVOLLMACHT:** Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Customer No. 25227

And I hereby appoint

Telefongespräche bitte richten an:  
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

Ext. \_\_\_\_\_

Postanschrift:

Send Correspondence to:

Morrison and Foerster LLP  
2000 Pennsylvania Ave., NW 20006-1888 Washington, DC  
Telephone: (001) 202 887 1500 and Facsimile (001) 202 887 0763  
or  
**Customer No. 25227**

Voller Name des einzigen oder ursprünglichen Erfinders: <b>Martin Rossbach</b>		Full name of sole or first inventor: <b>Martin Rossbach</b>	
Unterschrift des Erfinders <i>[Signature]</i>	Datum <b>06.02.02</b>	Inventor's signature <i>[Signature]</i>	Date <b>06.02.02</b>
Wohnsitz <b>Nuernberg, Deutschland</b>		Residence <b>Nuernberg, Germany</b>	
Staatsangehörigkeit <b>Deutsch</b>		Citizenship <b>German</b>	
Postanschrift <b>Wertheimer Str.3</b>		Post Office Address <b>Wertheimer Str.3</b>	
<b>90427 Nuernberg</b>		<b>90427 Nuernberg</b>	
<b>Deutschland</b>		<b>Germany</b>	
Voller Name des zweiten Miterfinders (falls zutreffend):		Full name of second joint inventor, if any:	
Unterschrift des Erfinders	Datum	Second Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).